



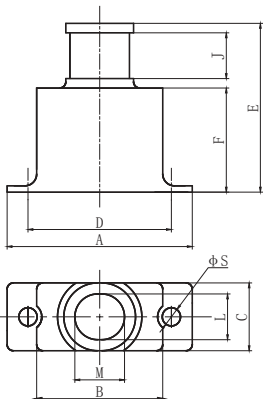





Crimp Style Backshell			
Stereogram & feature			Outline dimension
 AA AA style: two-piece, standard type	 AB AB style: one-piece, standard type	 AC AC style: one-piece, wide entry.	
 AD AD style: two-piece, elongated type	 AH AH style: two-piece, non-skid type	 AJ AJ style: two-piece, non-skid and elongatad type	
 AG AD style: one-piece, standard type with 90° entry.			

Notes: all dimensions are in mm.









Outline dimension of backshell

Part No.	Outline dimension(in mm)									
	A	B	C	D	E	F	J	φS	L	M
R04S-9-AA	19.6	12.1	8.7	14.3	21.4	13.2	5.8	2.31	—	4.7
R04S-15-AA	23.5	16	8.7	18.2	21.4	13.2	5.8	2.31	—	5.8
R04S-21-AA	27.3	19.8	8.7	22	21.4	13.2	5.8	2.31	—	6.5
R04S-25-AA	29.8	22.3	8.7	24.5	21.4	13.2	5.8	2.31	6.6	7.9
R04S-31-AA	33.6	26.1	8.7	28.3	21.4	13.2	5.8	2.31	6.6	8.4
R04S-37-AA	37.4	29.9	8.7	32.1	21.4	13.2	5.8	2.31	6.6	9.5
R04S-A51-AA	46.3	38.8	8.7	41	21.4	13.2	5.8	2.31	6.6	13.1
R04S-51-AA	36.2	28.7	9.7	30.9	23.7	15.5	5.8	2.31	7.5	11.9
R04S-69-AA	43.8	36.3	9.7	38.5	23.7	15.5	5.8	2.31	7.5	15.7
R04S-100-AA	54.7	38.8	11	45.7	24.2	16	5.8	3.7	8.7	17.5
R04S-9-AB	19.6	11.2	8.7	14.3	21.4	13.2	5.8	2.31	—	4.7
R04S-15-AB	23.5	15	8.7	18.2	21.4	13.2	5.8	2.31	—	5.8
R04S-21-AB	27.3	18.8	8.7	22	21.4	13.2	5.8	2.31	—	6.5
R04S-25-AB	29.8	21.4	8.7	24.5	21.4	13.2	5.8	2.31	6.7	7.8
R04S-31-AB	33.6	25.2	8.7	28.3	21.4	13.2	5.8	2.31	6.7	8.3
R04S-37-AB	37.4	29	8.7	32.1	21.4	13.2	5.8	2.31	6.7	9.5
R04S-A51-AB	46.3	37.9	8.7	41	21.4	13.2	5.8	2.31	6.7	13
R04S-51-AB	36.2	27.8	9.7	30.9	23.7	15.5	5.8	2.31	7.5	11.9
R04S-69-AB	43.8	35.4	9.7	38.5	23.7	15.5	5.8	2.31	7.5	15.7
R04S-100-AB	54.7	38.7	11	45.7	24.2	16	5.8	3.7	8.7	17.4
R04S-9-AC	19.6	11.2	8.7	14.3	21.4	13.2	5.8	2.31	6.7	7.9
R04S-15-AC	23.5	15	8.7	18.2	21.4	13.2	5.8	2.31	6.7	11.6
R04S-21-AC	27.3	18.8	8.7	22	21.4	13.2	5.8	2.31	6.7	15.4
R04S-25-AC	29.8	21.4	8.7	24.5	21.4	13.2	5.8	2.31	6.7	18
R04S-31-AC	33.6	25.2	8.7	28.3	21.4	13.2	5.8	2.31	6.7	21.8
R04S-37-AC	37.4	29	8.7	32.1	21.4	13.2	5.8	2.31	6.7	25.6
R04S-A51-AC	46.3	37.9	8.7	41	21.4	13.2	5.8	2.31	6.7	26.2
R04S-51-AC	36.2	27.8	9.7	30.9	23.7	15.5	5.8	2.31	7.5	23.4
R04S-69-AC	43.8	35.4	9.7	38.5	23.7	15.5	5.8	2.31	7.5	29.4
R04S-100-AC	54.7	38.7	11	45.7	24.2	16	5.8	3.7	8.7	34.1
R04S-9-AD	19.6	12.1	8.7	14.3	29.4	21.2	5.8	2.31	—	4.7
R04S-15-AD	23.5	16	8.7	18.2	29.4	21.2	5.8	2.31	—	5.8
R04S-21-AD	27.3	19.8	8.7	22	29.4	21.2	5.8	2.31	—	6.5
R04S-25-AD	29.8	22.3	8.7	24.5	29.4	21.2	5.8	2.31	6.6	7.9
R04S-31-AD	33.6	26.1	8.7	28.3	29.4	21.2	5.8	2.31	6.6	8.4
R04S-37-AD	37.4	29.9	8.7	32.1	29.4	21.2	5.8	2.31	6.6	9.5
R04S-A51-AD	46.3	38.8	8.7	41	29.4	21.2	5.8	2.31	6.6	13.1
R04S-51-AD	36.2	28.7	9.7	30.9	31.7	23.5	5.8	2.31	7.5	11.9
R04S-69-AD	43.8	36.3	9.7	38.5	31.7	23.5	5.8	2.31	7.5	15.7
R04S-100-AD	54.7	38.8	11	45.7	32.2	24	5.8	3.7	8.7	17.5
R04S-9-AH	19.6	11.2	8.7	14.3	21.4	13.2	5.8	2.31	—	4.7
R04S-15-AH	23.5	15	8.7	18.2	21.4	13.2	5.8	2.31	—	5.8
R04S-21-AH	27.3	18.8	8.7	22	21.4	13.2	5.8	2.31	—	6.5
R04S-25-AH	29.8	21.4	8.7	24.5	21.4	13.2	5.8	2.31	6.7	7.8

Outline dimension of backshell

Part No.	Outline dimension(in mm)									
	A	B	C	D	E	F	J	ΦS	L	M
R04S-31-AH	33.6	25.2	8.7	28.3	21.4	13.2	5.8	2.31	6.7	8.3
R04S-37-AH	37.4	29	8.7	32.1	21.4	13.2	5.8	2.31	6.7	9.5
R04S-A51-AH	46.3	37.9	8.7	41	21.4	13.2	5.8	2.31	6.7	13
R04S-51-AH	36.2	27.8	9.7	30.9	23.7	15.5	5.8	2.31	7.5	11.9
R04S-69-AH	43.8	35.4	9.7	38.5	23.7	15.5	5.8	2.31	7.5	15.7
R04S-100-AH	54.7	38.7	11	45.7	24.2	16	5.8	3.7	8.7	17.4
R04S-9-AJ	19.6	12.1	8.7	14.3	29.4	21.2	5.8	2.31	—	4.7
R04S-15-AJ	23.5	16	8.7	18.2	29.4	21.2	5.8	2.31	—	5.8
R04S-21-AJ	27.3	19.8	8.7	22	29.4	21.2	5.8	2.31	—	6.5
R04S-25-AJ	29.8	22.3	8.7	24.5	29.4	21.2	5.8	2.31	6.6	7.9
R04S-31-AJ	33.6	26.1	8.7	28.3	29.4	21.2	5.8	2.31	6.6	8.4
R04S-37-AJ	37.4	29.9	8.7	32.1	29.4	21.2	5.8	2.31	6.6	9.5
R04S-A51-AJ	46.3	38.8	8.7	41	29.4	21.2	5.8	2.31	6.6	13.1
R04S-51-AJ	36.2	28.7	9.7	30.9	31.7	23.5	5.8	2.31	7.5	11.9
R04S-69-AJ	43.8	36.3	9.7	38.5	31.7	23.5	5.8	2.31	7.5	15.7
R04S-100-AJ	54.7	38.8	11	45.7	32.2	24	5.8	3.7	8.7	17.5
R04S-9-AG	19.6	11.2	8.7	14.3	17.3	19.4	—	2.31	—	4.7
R04S-15-AG	23.5	15	8.7	18.2	18.4	23.2	—	2.31	—	5.8
R04S-21-AG	27.3	18.8	8.7	22	19.1	27	—	2.31	—	6.5
R04S-25-AG	29.8	21.4	8.7	24.5	20.4	29.6	—	2.31	6.7	7.8
R04S-31-AG	33.6	25.2	8.7	28.3	20.9	33.4	—	2.31	6.7	8.3
R04S-37-AG	37.4	29	8.7	32.1	22.1	37.2	—	2.31	6.7	9.5
R04S-A51-AG	46.3	37.9	8.7	41	25.6	46.1	—	2.31	6.7	13
R04S-51-AG	36.2	27.8	9.7	30.9	24.5	36	—	2.31	7.5	11.9
R04S-69-AG	43.8	35.4	9.7	38.5	28.3	43.6	—	2.31	7.5	15.7
R04S-100-AG	54.7	38.7	11	45.7	30	46.9	—	3.7	8.7	17.4

Solder Cup Style Backshell

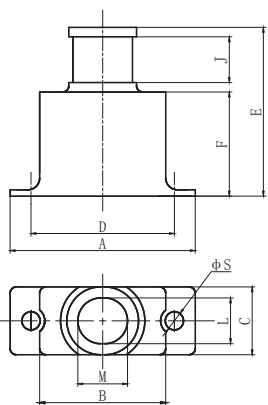Stereogram & feature		Outline dimension
 AB AB style: one-piece, standard type	 AC AC style: one-piece, wide entry.	
 AD AD style: two-piece, elongated type	 AJ AJ style: two-piece, non-skid and elongatad type	
 AG AD style: one-piece, standard type with 90 °entry		

Notes: all dimensions are in mm.



Outline dimension of backshell

Part No.	Outline dimension(in mm)									
	A	B	C	D	E	F	J	φS	L	M
R04S-9-AB	19.6	11.2	8.7	14.3	21.4	13.2	5.8	2.31	—	4.7
R04S-15-AB	23.5	15	8.7	18.2	21.4	13.2	5.8	2.31	—	5.8
R04S-21-AB	27.3	18.8	8.7	22	21.4	13.2	5.8	2.31	—	6.5
R04S-25-AB	29.8	21.4	8.7	24.5	21.4	13.2	5.8	2.31	6.7	7.8
R04S-31-AB	33.6	25.2	8.7	28.3	21.4	13.2	5.8	2.31	6.7	8.3
R04S-37-AB	37.4	29	8.7	32.1	21.4	13.2	5.8	2.31	6.7	9.5
R04S-A51-AB	46.3	37.9	8.7	41	21.4	13.2	5.8	2.31	6.7	13
R04S-51-AB	36.2	27.8	9.7	30.9	23.7	15.5	5.8	2.31	7.5	11.9
R04S-69-AB	43.8	35.4	9.7	38.5	23.7	15.5	5.8	2.31	7.5	15.7
R04S-100-AB	54.7	38.7	11	45.7	24.2	16	5.8	3.7	8.7	17.4
R04S-9-AC	19.6	11.2	8.7	14.3	21.4	13.2	5.8	2.31	6.7	7.9
R04S-15-AC	23.5	15	8.7	18.2	21.4	13.2	5.8	2.31	6.7	11.6
R04S-21-AC	27.3	18.8	8.7	22	21.4	13.2	5.8	2.31	6.7	15.4
R04S-25-AC	29.8	21.4	8.7	24.5	21.4	13.2	5.8	2.31	6.7	18
R04S-31-AC	33.6	25.2	8.7	28.3	21.4	13.2	5.8	2.31	6.7	21.8
R04S-37-AC	37.4	29	8.7	32.1	21.4	13.2	5.8	2.31	6.7	25.6
R04S-A51-AC	46.3	37.9	8.7	41	21.4	13.2	5.8	2.31	6.7	26.2
R04S-51-AC	36.2	27.8	9.7	30.9	23.7	15.5	5.8	2.31	7.5	23.4
R04S-69-AC	43.8	35.4	9.7	38.5	23.7	15.5	5.8	2.31	7.5	29.4
R04S-100-AC	54.7	38.7	11	45.7	24.2	16	5.8	3.7	8.7	34.1
R04S-9-AD	19.6	12.1	8.7	14.3	29.4	21.2	5.8	2.31	—	4.7
R04S-15-AD	23.5	16	8.7	18.2	29.4	21.2	5.8	2.31	—	5.8
R04S-21-AD	27.3	19.8	8.7	22	29.4	21.2	5.8	2.31	—	6.5
R04S-25-AD	29.8	22.3	8.7	24.5	29.4	21.2	5.8	2.31	6.6	7.9
R04S-31-AD	33.6	26.1	8.7	28.3	29.4	21.2	5.8	2.31	6.6	8.4
R04S-37-AD	37.4	29.9	8.7	32.1	29.4	21.2	5.8	2.31	6.6	9.5
R04S-A51-AD	46.3	38.8	8.7	41	29.4	21.2	5.8	2.31	6.6	13.1
R04S-51-AD	36.2	28.7	9.7	30.9	31.7	23.5	5.8	2.31	7.5	11.9
R04S-69-AD	43.8	36.3	9.7	38.5	31.7	23.5	5.8	2.31	7.5	15.7
R04S-100-AD	54.7	38.8	11	45.7	32.2	24	5.8	3.7	8.7	17.5
R04S-9-AJ	19.6	12.1	8.7	14.3	29.4	21.2	5.8	2.31	—	4.7
R04S-15-AJ	23.5	16	8.7	18.2	29.4	21.2	5.8	2.31	—	5.8
R04S-21-AJ	27.3	19.8	8.7	22	29.4	21.2	5.8	2.31	—	6.5
R04S-25-AJ	29.8	22.3	8.7	24.5	29.4	21.2	5.8	2.31	6.6	7.9
R04S-31-AJ	33.6	26.1	8.7	28.3	29.4	21.2	5.8	2.31	6.6	8.4
R04S-37-AJ	37.4	29.9	8.7	32.1	29.4	21.2	5.8	2.31	6.6	9.5
R04S-A51-AJ	46.3	38.8	8.7	41	29.4	21.2	5.8	2.31	6.6	13.1
R04S-51-AJ	36.2	28.7	9.7	30.9	31.7	23.5	5.8	2.31	7.5	11.9
R04S-69-AJ	43.8	36.3	9.7	38.5	31.7	23.5	5.8	2.31	7.5	15.7
R04S-100-AJ	54.7	38.8	11	45.7	32.2	24	5.8	3.7	8.7	17.5
R04S-9-AG	19.6	11.2	8.7	14.3	17.3	19.4	—	2.31	—	4.7
R04S-15-AG	23.5	15	8.7	18.2	18.4	23.2	—	2.31	—	5.8
R04S-21-AG	27.3	18.8	8.7	22	19.1	27	—	2.31	—	6.5
R04S-25-AG	29.8	21.4	8.7	24.5	20.4	29.6	—	2.31	6.7	7.8

Outline dimension of backshell

Part No.	Outline dimension(in mm)									
	A	B	C	D	E	F	J	ΦS	L	M
R04S-31-AG	33.6	25.2	8.7	28.3	20.9	33.4	—	2.31	6.7	8.3
R04S-37-AG	37.4	29	8.7	32.1	22.1	37.2	—	2.31	6.7	9.5
R04S-A51-AG	46.3	37.9	8.7	41	25.6	46.1	—	2.31	6.7	13
R04S-51-AG	36.2	27.8	9.7	30.9	24.5	36	—	2.31	7.5	11.9
R04S-69-AG	43.8	35.4	9.7	38.5	28.3	43.6	—	2.31	7.5	15.7
R04S-100-AG	54.7	38.7	11	45.7	30	46.9	—	3.7	8.7	17.4